

PL-TR-91-2087

AD-A237 736



MILLIMETER-ACCURACY SATELLITE NAVIGATION

C. C. Counselman

Massachusetts Institute of Technology
77 Massachusetts Avenue
Cambridge, MA 02139

8 April 1991

DTIC
ELECTE
JUL 10 1991
S B D

Scientific Report No. 9

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED.




PHILLIPS LABORATORY
AIR FORCE SYSTEMS COMMAND
HANSCom AIR FORCE BASE, MASSACHUSETTS 01731-5000

91-04310



91 7 8 009


This technical report has been reviewed and is approved for publication



THOMAS P. ROONEY
Contract Manager



THOMAS P. ROONEY
Branch Chief



DONALD H. ECKHARDT
Division Director

This report has been reviewed by the ESD Public Affairs Office (PA) and is releasable to the National Technical Information Service (NTIS).

Qualified requestors may obtain additional copies from the Defense Technical Information Center. All others should apply to the National Technical Information Service.

If your address has changed, or if you wish to be removed from the mailing list, or if the addressee is no longer employed by your organization, please notify PL/IMA, Hanscom AFB, MA 01731-5000. This will assist us in maintaining a current mailing list.

Do not return copies of this report unless contractual obligations or notices on a specific document requires that it be returned.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE

REPORT DOCUMENTATION PAGE

1a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED		1b. RESTRICTIVE MARKINGS N/A	
2a. SECURITY CLASSIFICATION AUTHORITY		3. DISTRIBUTION / AVAILABILITY OF REPORT Approved for public release; distribution unlimited.	
2b. DECLASSIFICATION / DOWNGRADING SCHEDULE			
4. PERFORMING ORGANIZATION REPORT NUMBER(S)		5. MONITORING ORGANIZATION REPORT NUMBER(S) PL-TR-91-2087	
6a. NAME OF PERFORMING ORGANIZATION Massachusetts Institute of Technology	6b. OFFICE SYMBOL (If applicable) Room 37-552	7a. NAME OF MONITORING ORGANIZATION Phillips Laboratory	
6c. ADDRESS (City, State, and ZIP Code) 77 Massachusetts Avenue Cambridge, MA 02139		7b. ADDRESS (City, State, and ZIP Code) Hanscom Air Force Base, MA 01731 5000	
8a. NAME OF FUNDING / SPONSORING ORGANIZATION Phillips Laboratory	8b. OFFICE SYMBOL (If applicable) GL/LWG	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER F19628-86-K-0009	
8c. ADDRESS (City, State, and ZIP Code) Hanscom Air Force Base, MA 01731-5000		10. SOURCE OF FUNDING NUMBERS	
		PROGRAM ELEMENT NO. 61102F	PROJECT NO. 2309
		TASK NO. G1	WORK UNIT ACCESSION NO. BN
11. TITLE (Include Security Classification) Millimeter-Accuracy Satellite Navigation			
12. PERSONAL AUTHOR(S) C. C. Counselman			
13a. TYPE OF REPORT Scientific No. 9	13b. TIME COVERED FROM 86Apr29 TO 91Apr08	14. DATE OF REPORT (Year, Month, Day) 91 Apr 08	15. PAGE COUNT 24
16. SUPPLEMENTARY NOTATION Copies of 22 transparencies projected during oral presentation at C. S. Draper Laboratory. These provide an outline of the talk. A complete transcript does not exist.			
17. COSATI CODES		18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)	
FIELD	GROUP	SUB-GROUP	
08	05		
		NAVSTAR Global Positioning System, GPS, satellite navigation, satellite geodesy, space geodesy, radio positioning, radio interferometry	
19. ABSTRACT (Continue on reverse if necessary and identify by block number) Millimeter-accuracy satellite navigation, defined as the determination of instantaneous position coordinates of a point on a moving platform (land/sea/air/space vehicle) with respect to a reference frame defined by points fixed on the ground, with millimeter-level uncertainties, is possible using the satellite radio interferometry techniques developed under Contract F19628-86-K-0009 and its predecessors. These techniques include use of doubly-differenced, dual-band, reconstructed-carrier phase observations of the NAVSTAR GPS satellites simultaneously from the "unknown" point and from fixed reference points suitably arrayed on the ground so that the integer-cycle ambiguities of their observations can be resolved to reduce satellite orbit uncertainties. For instantaneous ambiguity resolution of the moving-platform observations, at least seven satellites must be observed simultaneously. If the available number of NAVSTAR satellites is insufficient, GLONASS satellites may be used. Other options for ambiguity resolution are also available.			
20. DISTRIBUTION / AVAILABILITY OF ABSTRACT <input type="checkbox"/> UNCLASSIFIED/UNLIMITED <input checked="" type="checkbox"/> SAME AS RPT <input type="checkbox"/> DTIC USERS		21. ABSTRACT SECURITY CLASSIFICATION UNCLASSIFIED	
22a. NAME OF RESPONSIBLE INDIVIDUAL Dr. Thomas P. Rooney		22b. TELEPHONE (Include Area Code) (617) 377 3486	22c. OFFICE SYMBOL PL/LWG

MILLIMETER-ACCURACY SATELLITE NAVIGATION

Definition:

Determining instantaneous position coordinates of a point on a moving platform (land / sea / air / space vehicle) with respect to a reference frame defined by points fixed on the ground, with 1-mm uncertainties.

“Satellite navigation” means navigation using satellites. (The moving platform may also be a satellite.)

MILLIMETER-ACCURACY SATELLITE NAVIGATION

Object of this talk:

To convince you that mm-level
navigation is possible.

Plan:

1. Show you how positions of fixed points have been determined with millimeter accuracy.
2. Show you how positions of moving points have been determined with centimeter accuracy under certain conditions.
3. Discuss problems and solutions.

***Re:* HOW POSITIONS OF FIXED
POINTS HAVE BEEN DETERMINED
WITH MILLIMETER ACCURACY**

1. The basic method.
2. Some results.
3. What the major problems have been, and how they have been solved.

Accession For	
NTIS GRA&I	<input checked="checked" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

BASIC METHOD (simplified):

1. Observe L1- & L2-band radio signals transmitted by GPS satellites.
2. Use observations from 3 fixed reference points to determine satellite orbits with respect to the coordinate frame defined by these points.
3. Use observations at an unknown position to determine the unknown position coordinates.

TRICK #1:

Observe & use the *carrier-wave phases* of the GPS signals.

Easy to measure within 0.1 radian,
equivalent to 3 mm of path length.

Possible to measure within 0.03 rad,
equivalent to 1 mm.

TRICK #2:

Use only *doubly-differenced* carrier-phase observations.

Difference between simultaneous observations of same satellite at two receiving points cancels sensitivity to satellite-transmitter phase.

Difference between simultaneous observations of any two satellites at any receiving point cancels sensitivity to receiver-related phase.

Double-Differencing (continued):

In general, sensitivity to any “common-mode” effect, including any

- receiver-related (satellite-independent) effect, or any
- satellite-related (receiver-independent) effect,

cancels when observations are doubly-differenced.


The only surviving effects are those which are “doubly different,”

i.e., different for observations of different satellites, *differently* at different receivers.


Surviving Effects, Bad & Good:

Chief of the baddies (error sources) is tropospheric refractivity. *E.g.* at one of the receiving points but not the other, one of the satellites but not the other appears behind a cloud. A problem if observing from under the weather.

The desired sensitivity of the observations (to the unknown position) is not at all reduced by differencing between this position and another, and is not much reduced by differencing between satellites if these satellites are well separated in the sky.

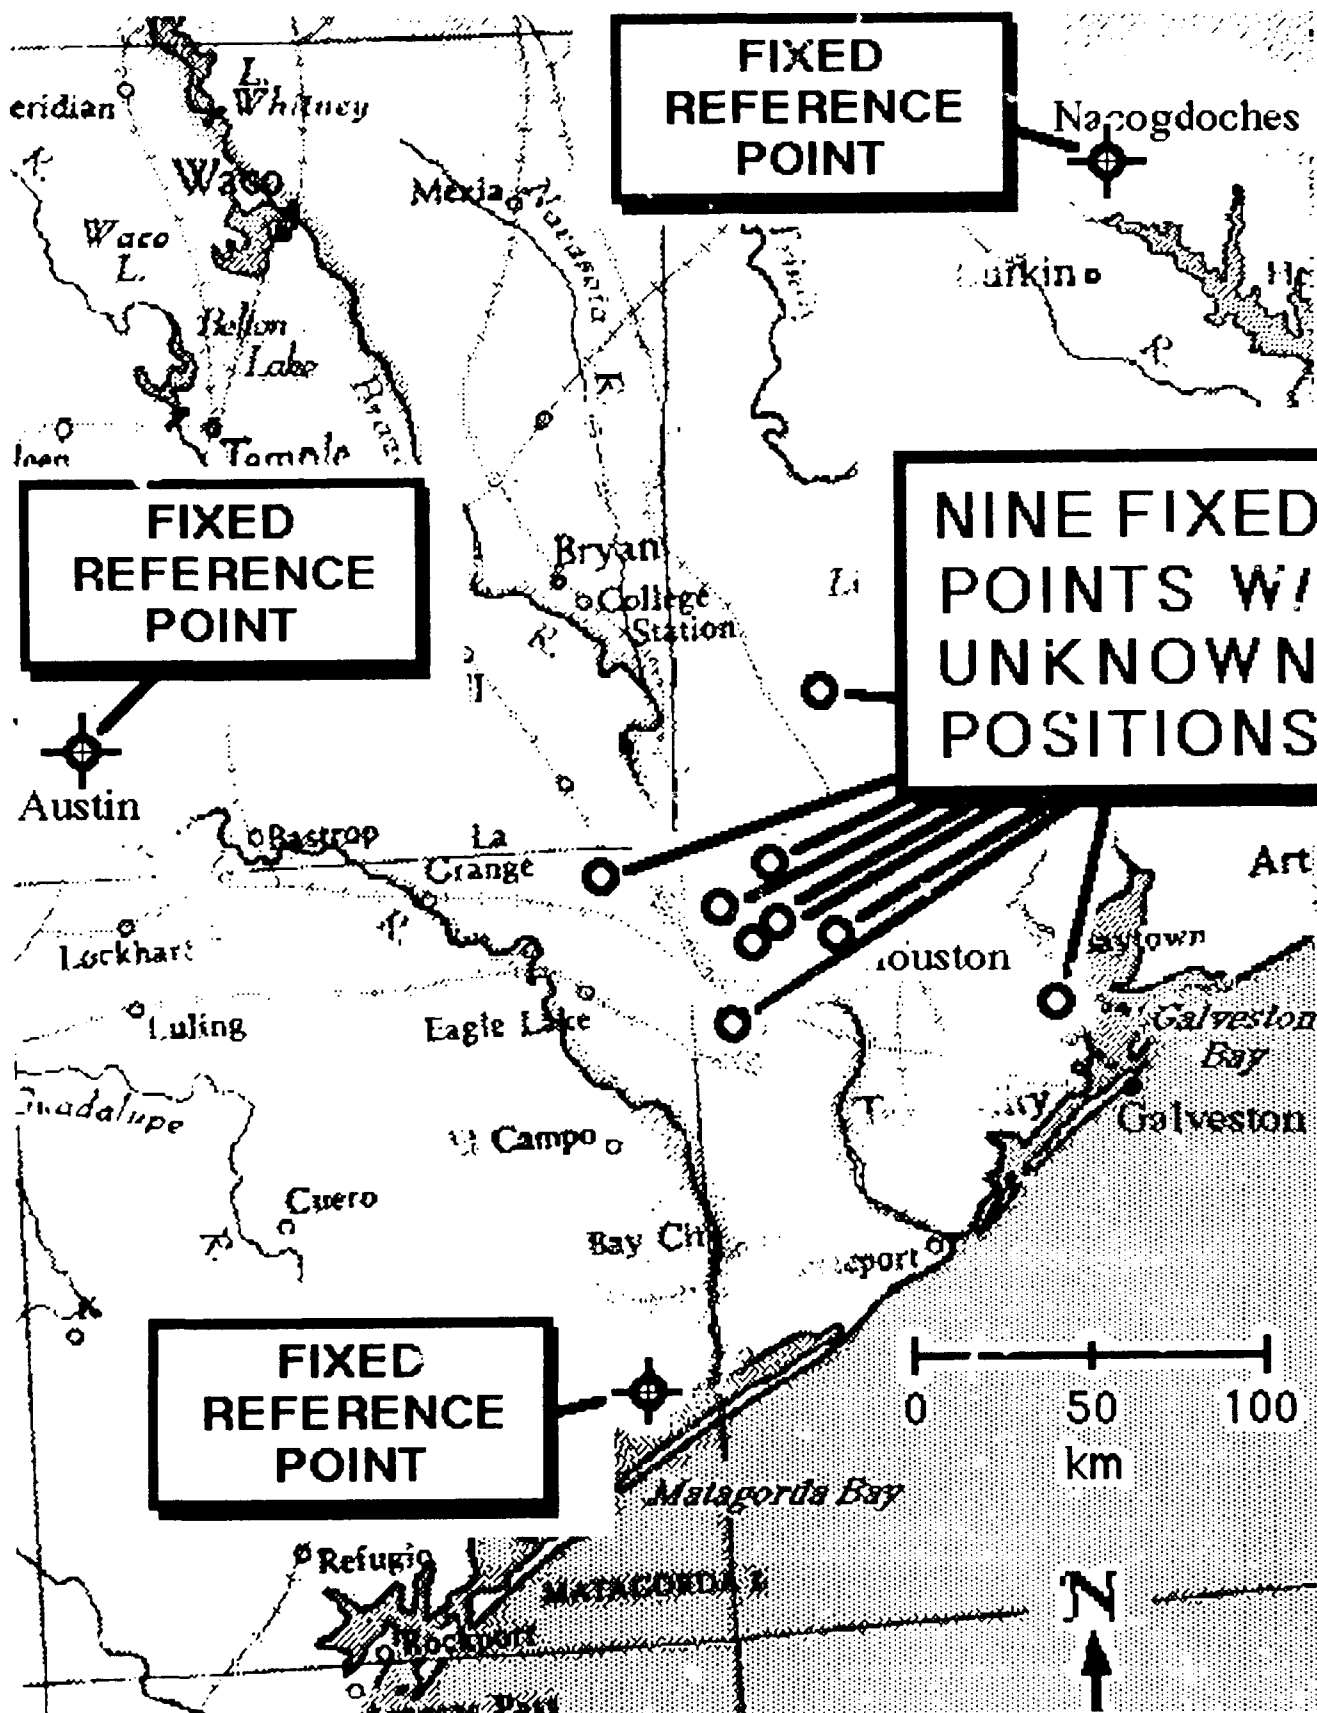

Scatter of Repeated Determinations on Three Days (spanning a week) of the Nine Unknown Positions

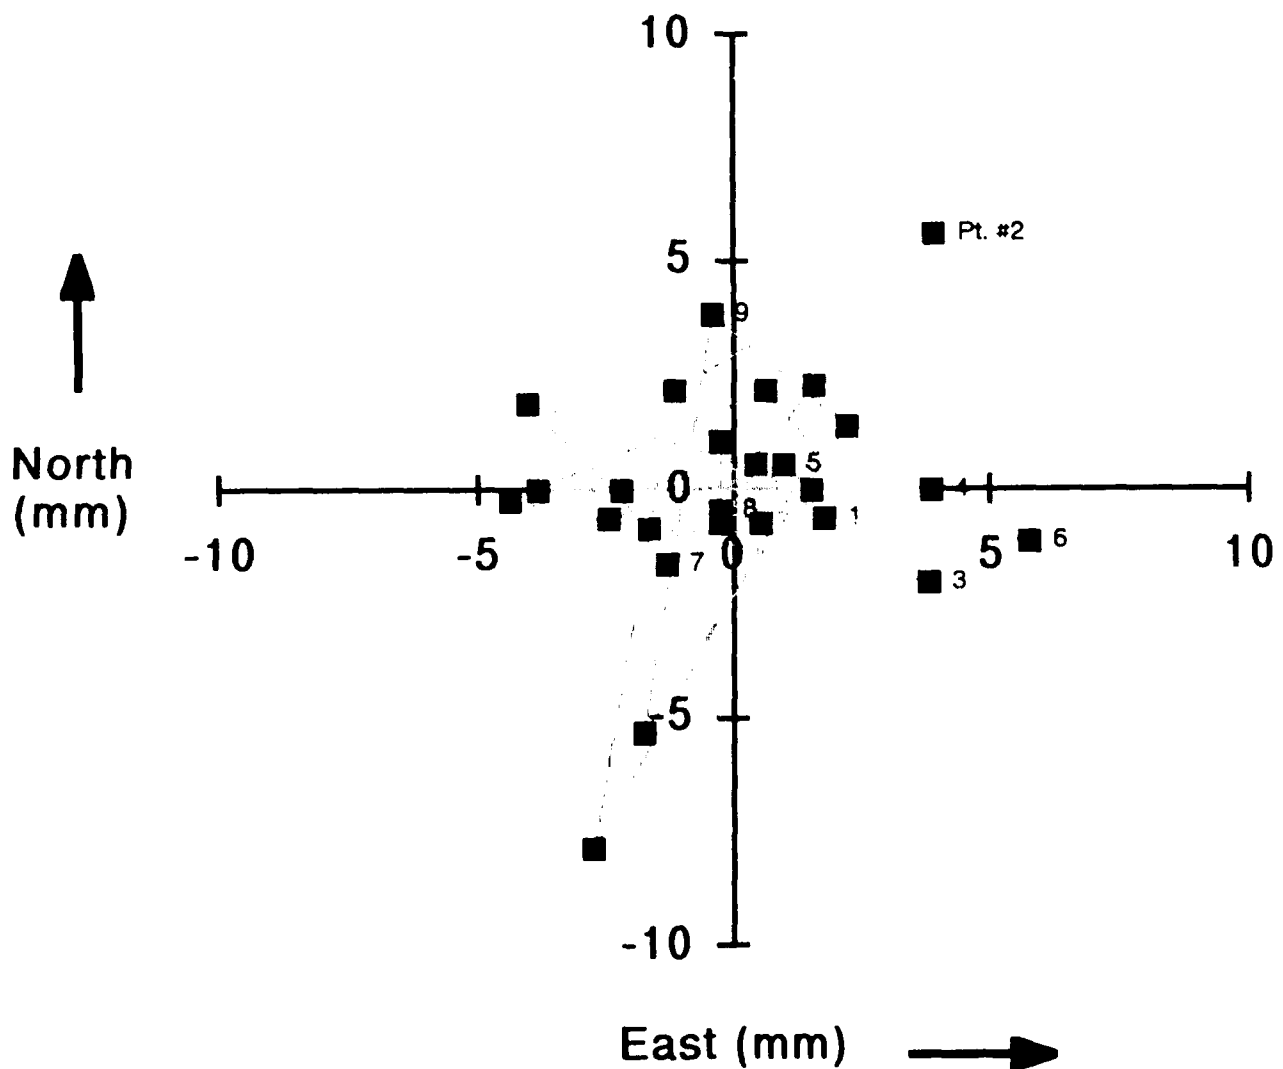

R.m.s. in ea. coord. ~2 mm.

FIXED-POSITIONING DEMONSTRATION

COMMENTS:

1. All antennas/receivers* removed and replaced each time.
2. All receivers were codeless (immune to GPS "A-S" and "S-A").
3. Nothing but crystal oscillators.
4. No observations except from the 12 points shown (3 ref. + 9 unk. pts.)**
5. Daytime, solar maximum (high and rapidly varying ionospheric refraction).
6. Gulf coast weather (humid, lots of clouds)

* except at two of the reference points, at Austin and Nacogdoches.

**Three other stations were used, on one day, to determine coordinates of reference points.

WHY IT'S FUNDAMENTALLY HARDER TO DETERMINE POSITION ON A MOVING PLATFORM (AS OPPOSED TO A FIXED POINT):

Errors can't be time-averaged. (The worst error source, doubly-different tropospheric refraction, varies over minutes to hours.)

WHY IT MAY (OR MAY NOT) BE HARDER IN PRACTICE:

Resolving the integer-cycle ambiguities of the doubly-differenced phase observations is harder if you can't wait for the satellites to move to different positions in the sky.

AMBIGUITY RESOLUTION

The interpretation of a (doubly-differenced) phase observation in terms of position is ambiguous. The “likelihood” function of position, given a set of phase-difference observations $\Delta\phi$ of one or more satellites, differenced between the unknown position \vec{r} and some reference position, is

$$L(\vec{r}) = \sum_{\substack{\text{over all} \\ \text{observ'n} \\ \text{times, } j}} \left| \sum_{\substack{\text{over all} \\ \text{satellites, } k}} e^{2\pi i (\Delta\phi_{jk} - \vec{r} \cdot \hat{s}_{jk}/\lambda)} \right|$$

(\hat{s}_{jk} = unit-vector in direction of k^{th} satellite at j^{th} observation time;

λ = carrier wavelength; sum may include observations at multiple wavelengths.)

AMBIGUITY EXAMPLE:

Suppose that there is just one observation time (*e.g.* because we want instantaneous position on a moving platform) and that two satellites, in directions \hat{s}_1 and \hat{s}_2 , are observed at this time. Then the position-likelihood is maximized by


$$\vec{r} \cdot (\hat{s}_1 - \hat{s}_2) = \lambda (\Delta\phi_1 - \Delta\phi_2 + n)$$

where n is any integer. The maximum-likelihood position estimate is the locus of points on an infinite set of parallel planes, perpendicular to $(\hat{s}_1 - \hat{s}_2)$ and separated along this direction by $\lambda/|\hat{s}_1 - \hat{s}_2|$.

ANOTHER EXAMPLE:

Six satellites observed at L1 wavelength only,
for 15 min. (each satellite moves $\sim 1/8^{\text{th}}$ rad.).

LIKELIHOOD FUNCTION (in E-W plane):

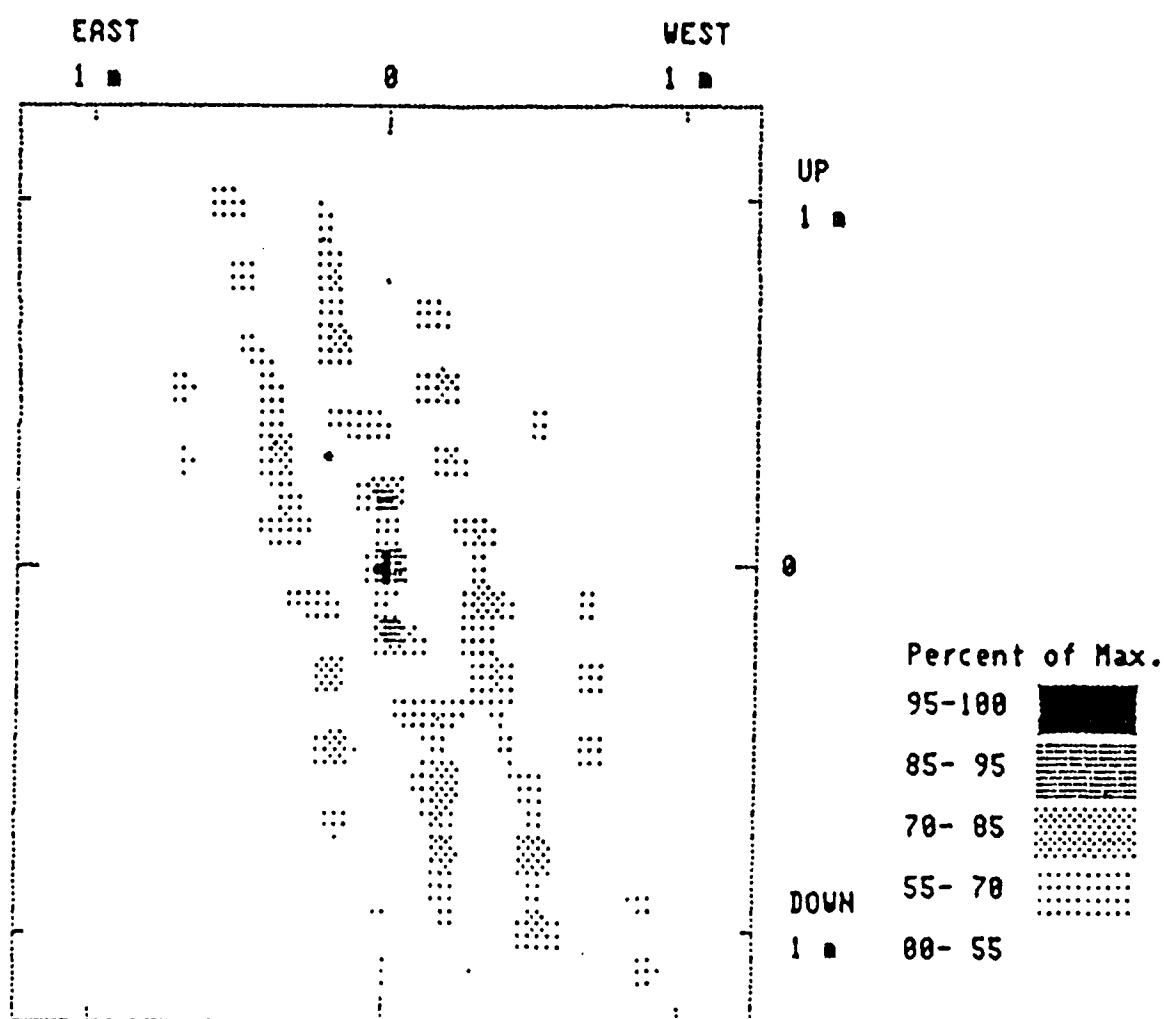

SAME EXAMPLE, except obs'ns continue for two hours (each satellite moves ~ 1 rad.).

LIKELIHOOD FUNCTION (in E-W plane):


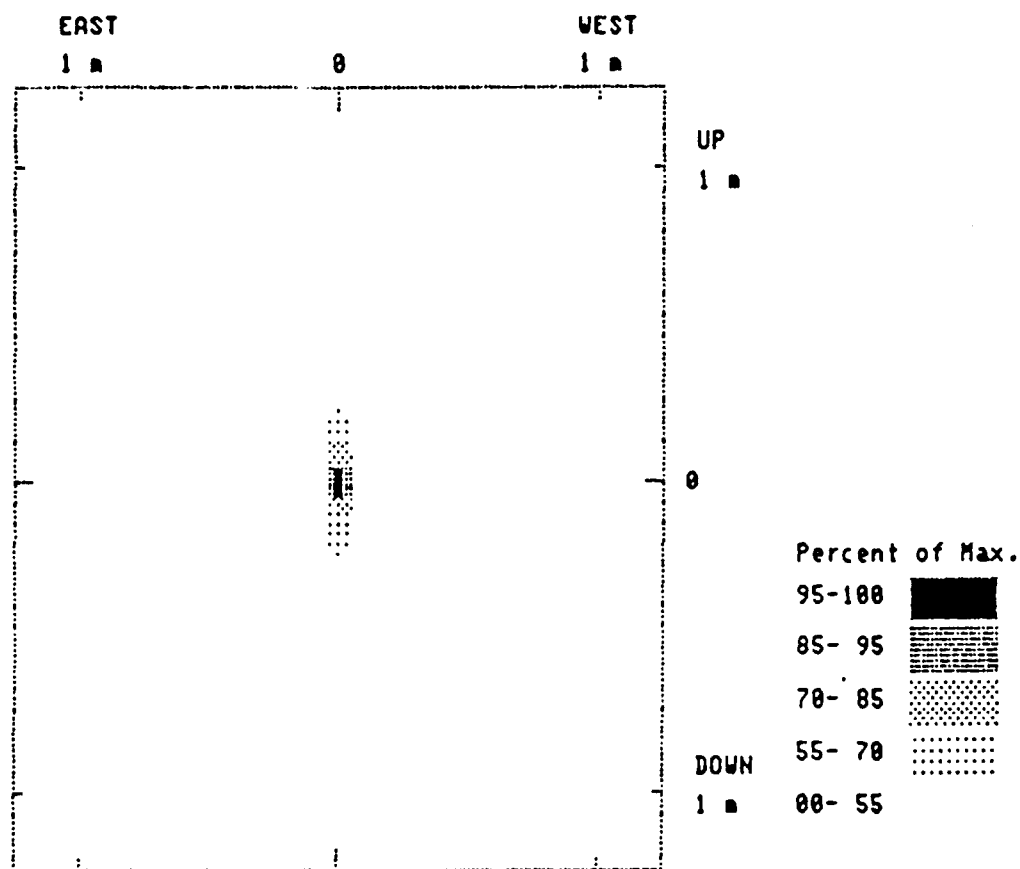


Fig. 2. Like Fig. 1, except the period of observation is 2 h instead of 15 min.

ANOTHER EXAMPLE (provided by G. L. Mader of NGS, Rockville):

- 7 satellites
- L1 & L2 wavelengths
- 1 point in time
- moving platform (P-3 airplane nr. Pax R.)

LIKELIHOOD FUNCTION (3-D, perspective view):

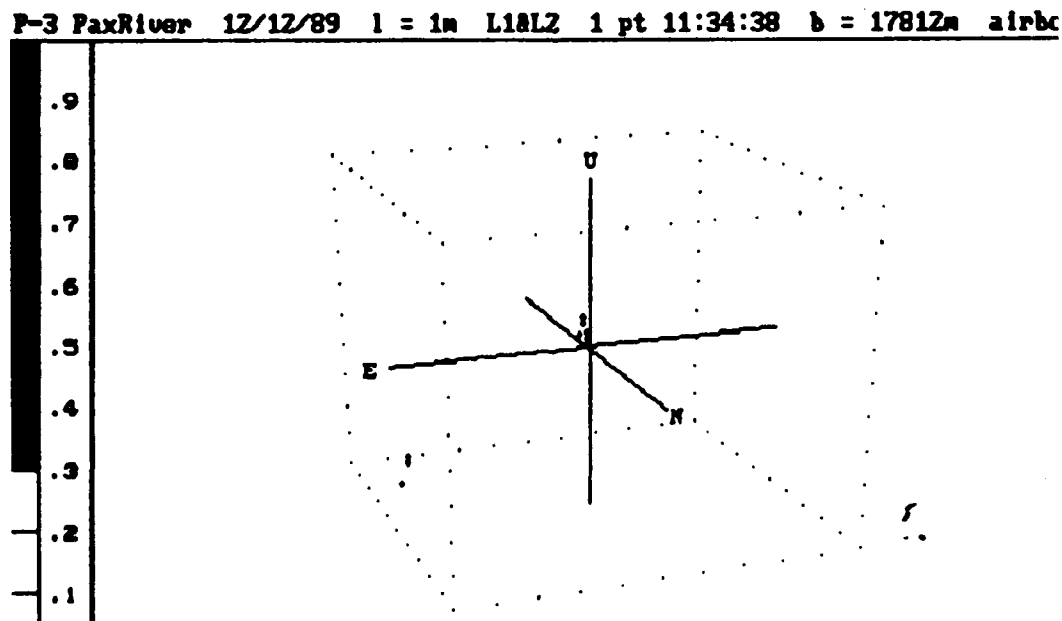

FOR *INSTANTANEOUS* AMBIGUITY

RESOLUTION:

- observe both L1 & L2
- account for ionosphere (unless very near reference point)
- observe at least 7 satellites

OPTIONS:

- resolve ambiguity once and maintain track
- combine GLONASS & GPS
- use other satellites (MARISAT;
GEOBEACON)

SUGGESTED READING

GL-TR-89-0231

**Feasibility of Millimeter-Accuracy Geodetic
Positioning and Vehicle Tracking
With Repeater Satellites**

Laureano Alberto Cangahuala

**Massachusetts Institute of Technology
77 Massachusetts Avenue
Cambridge, MA 02139**

27 July 1989

Scientific Report No. 5

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED

**GEOPHYSICS LABORATORY
AIR FORCE SYSTEMS COMMAND
UNITED STATES AIR FORCE
HANSCOM AIR FORCE BASE, MASSACHUSETTS 01731-5000**

[54] TECHNIQUES FOR DETERMINING
ORBITAL DATA

- [75] Inventor: Charles C. Counselman, III, Belmont,
Mass.
[73] Assignee: Massachusetts Institute of
Technology, Cambridge, Mass.
[21] Appl. No.: 330,976
[22] Filed: Mar. 29, 1989

Related U.S. Application Data

- [63] Continuation of Ser. No. 28,712, Mar. 20, 1987, aban-
doned.
[51] Int. Cl.⁴ H04B 7/185; G01S 5/02;
G01C 21/00
[52] U.S. CL. 342/352; 342/424;
364/459
[58] Field of Search 342/352, 356, 357, 358,
342/424; 364/459

[56] References Cited

U.S. PATENT DOCUMENTS

- 4,387,376 6/1983 Shermil et al. 342/424
4,647,942 3/1987 Counselman, III 343/797
4,667,203 5/1987 Counselman, III 342/357
4,809,005 2/1989 Counselman, III 342/352

FOREIGN PATENT DOCUMENTS

- 2120489 2/1986 United Kingdom

OTHER PUBLICATIONS

- King et al., *Surveying with GPS*, Monograph, No. 9,
School of Surveying, Univ. of New South Wales, 1985.
Bossler et al., *Using the Global Positioning System for
Geodetic Positioning*, pp. 553-563, Bull. Geod. 54
(1980).
W. N. Christensen and J. A. Hogbom, Chap. 7, Entitled
"Aperture Synthesis", pp. 171-189, of Book Entitled
"Radiotelescopes", Published in 1969 by the Cambridge
University Press, England.
A. E. E. Rogers, "Very Long Baseline Interferometry
with Large Effective Bandwidth for Phase Delay Mea-
surements", *Radio Science*, vol. 5, No. 10, pp.
1239-1247, Oct., 1970.
A. E. E. Rogers, "Broad-Band Passive 90° RC Hybrid

with Low Component Sensitivity for Use in the Video
Range of Frequencies", *Proceedings of the IEEE*, vol.
59 (1971), pp. 1617-1618.

C. C. Counselman, III and I. I. Shapiro, "Miniature
Interferometer Terminals for Earth Surveying," *Pro-
ceedings of the Second International Symposium on Satel-
lite Doppler Positioning*, vol. 11, pp. 1237-1286, Jan.
1979, Available from the University of Texas at Austin.

(List continued on next page.)

Primary Examiner—Thomas H. Tarcza

Assistant Examiner—Gregory C. Issing

Attorney, Agent, or Firm—Morgan & Finnegan

[57] ABSTRACT

Techniques are disclosed for determining orbital data of
space borne vehicles including earth satellites such as
those of the NAVSTAR Global Positioning System.
Each of a set of such satellites transmits signals which
include carrier waves which may be suppressed, or only
implicitly present. The signals are received from the
observable satellites concurrently by means of an an-
tenna at each of at least three ground stations forming a
network of baselines. The stations are arrayed such that
the ratio of the maximum to the minimum baseline
length is much greater than one. From the signals re-
ceived at a station pair forming each baseline a time
series of doubly-differenced phase measurement data is
formed which is biased by an integer number of cycles
of phase. The data series for different satellite and sta-
tion pairs are processed together to determine the orbits
of the satellites and the doubly-differenced phase biases.
Unique determination of the integer values of at least
some of the biases is facilitated by the above noted
spatial arrangement of the stations such that the ratio of
the maximum to the minimum baseline length is much
greater than one. This integer bias determination en-
hances the accuracy of the related orbit determination.
Unique determination of the integer values of at least
some of the doubly-differenced carrier phase biases may
also be facilitated by the use of a plurality of carrier
frequencies with the ratio of the maximum to the mini-
mum frequency being much greater than one.

18 Claims, 6 Drawing Sheets

